

Littlite®


Gooseneck Lights and Accessories

Lectern Surface Mounting Options

Littlite offers a wide variety of products for surface and flush mounting applications ideal for reading lights for lecterns, pulpits, conference tables, control consoles, bed headboards, etc.

Our versatile task light system and mounting accessories can accommodate just about any installation requirement.

Littlite Lampsets

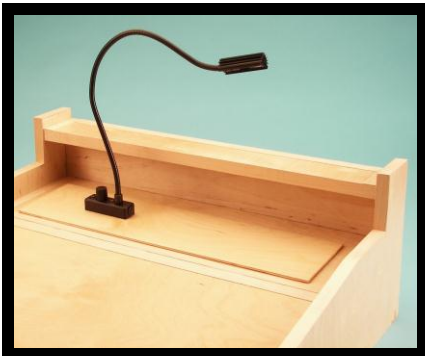

Littlite Lampset Installation Illustrated

All Littlite L-series lampsets use a 1" x 3" chassis to house the gooseneck and control switch/dimmer. Littlite lampsets are available in halogen and LED models with your choice of 6, 12 or 18" goosenecks. Our selection of lampsets can be found on line at www.littlite.com

Remove the two small Phillips screws from the top of the chassis. The mounting plate can now be separated from the chassis.

Position the mounting plate, mark and drill two 7/64" diameter holes into the mounting surface. (Note: before drilling, be sure the screws will not interfere with anything behind the surface.) Screw the mounting plate to the surface with #6 sheet metal screws.

Remount the top of the chassis taking care not to pinch any wires between the mounting plate and the top assembly.

Connect the 12-volt power supply.

Littlite LA Series



LA-18-HI Installation Illustrated

The Littlite LA series provides a sleek, flush mount light assembly. These products are pre-assembled and pre-wired at the factory so installation is quick and easy.

Use the template provided to drill access holes for the assembly. The template is also available on-line: <http://www.littlite.com/techinfo/LASeriesTemplate.pdf> .

Drop the assembly in place and secure with screws provided. Connect the 12-volt power supply and plug into wall socket.

Littlite, LLC, PO Box 430, Hamburg, Michigan 48139
(810) 231-9373 phone (810) 231-1631 fax
sales@littlite.com www.littlite.com

© 2009 Littlite, LLC
Not to be reprinted without permission.